


# Pyure Boss XL3™ Hydroxyl Generator Air & Surface Protection

## Product Specifications

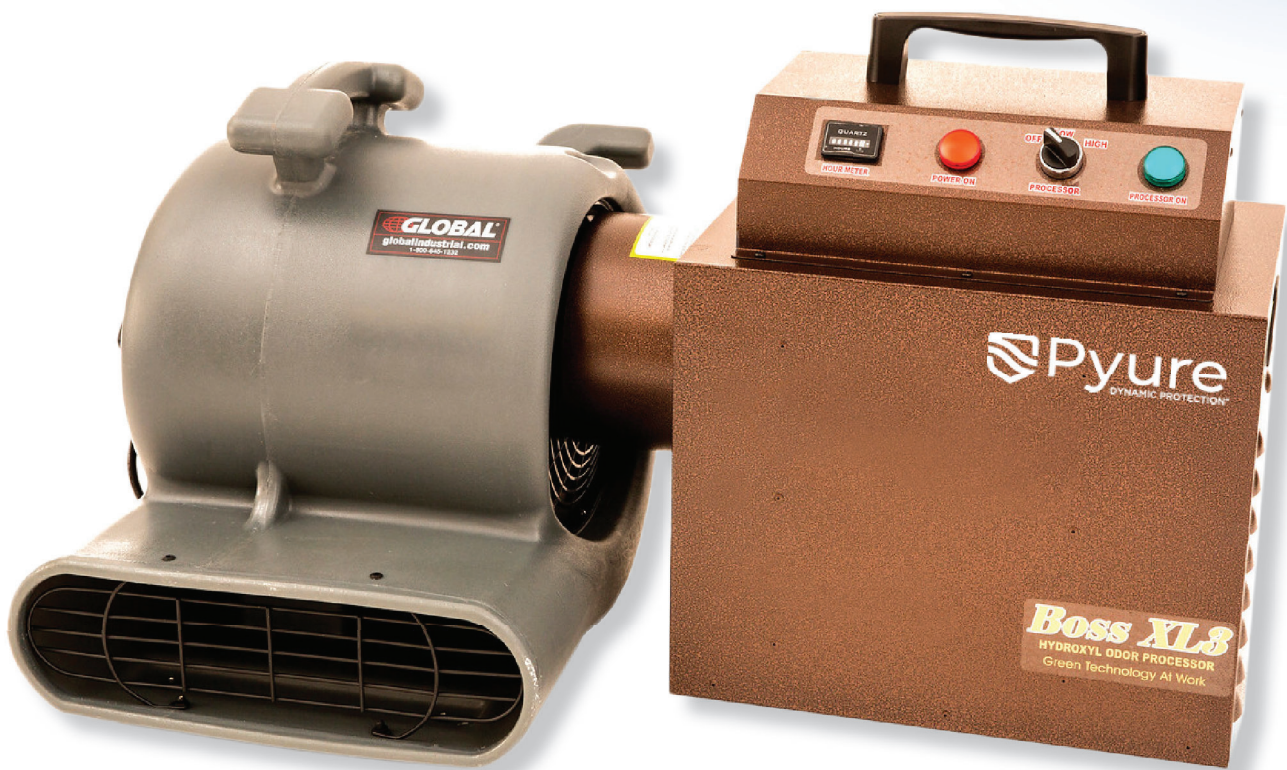

PORTABLE

# Boss XL3™ Hydroxyl Generator

The Boss XL3™ hydroxyl generator is designed for larger areas that require strong hydroxyl output to sanitize and deodorize. It can be used in large commercial open spaces and is ideal to treat large surfaces affected by fire and smoke, flood, nicotine, grey/black water, decomposition, mold, sewage and chemical spills or off-gassing. This unit is designed for use with an existing air mover (air mover is not included).

The table below summarizes the minimum treatment area in the absence of ventilation, and the treatment area range under typical operating conditions: 3 air changes per hour, 90% recirculated air, and 2.7 meters ceiling. If the treated space contains a high contamination or strong odors, the effective treatment area will be smaller than the range listed below. These guidelines should be adhered to for optimal performance and safety.

## Operating Guideline

<b>Minimum Area (if there is no air circulation)</b>	186 m <sup>2</sup>
<b>Treatment Range</b>	158 - 302 m <sup>2</sup>

## Specifications

<b>Dimensions (LxWxD)</b>	283mm x 514mm x 514mm
<b>Weight</b>	11.4kg
<b>Voltage</b>	230V @ 50Hz
<b>Power</b>	195 Watts (max) Without Blower
<b>Number of Optics</b>	3
<b>Shipping Dimensions</b>	559mm x 381mm x 749mm
<b>Shipping Weight</b>	13.6kg
<b>Certification</b>	UL 153, CSA C22.2 #250, CE, RoHS, REACH
<b>Warranty</b>	2 years covering defects in workmanship or materials, but excluding spare parts and consumables

Distributed by:



Copyright 2022, The Pyure Company.  
Boss XL3™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA



[post@mikrobe.no](mailto:post@mikrobe.no)  
[www.mikrobe.no](http://www.mikrobe.no)